

This guide contains instructions for **three different** digital cable boxes:

- Basic Digital Cable Box (DCT 2500)  
See **SECTION A** below
- High Definition Cable Box (HD 6200)  
See **SECTION B** below
- Digital Video Recorder with High Definition (HDDVR 6416)  
See **SECTION C** on reverse


- Under no circumstance should you hook-up a DVD player to your digital cable box.
- If you are having a home theatre system professionally installed, have the technician install your cable box during the process.
- If you cannot find instructions suited to your home theatre system in this install guide, visit [www.eastlink.ca](http://www.eastlink.ca) for additional installation options.

## SECTION A: SETTING UP YOUR BASIC DIGITAL CABLE BOX (DCT 2500)

### STEP 1: Hook up your digital box to your TV – **THREE** ways to connect


#### Option 1 – TV Set-Up (TV without video IN).

Watch all Digital channels available in your area.

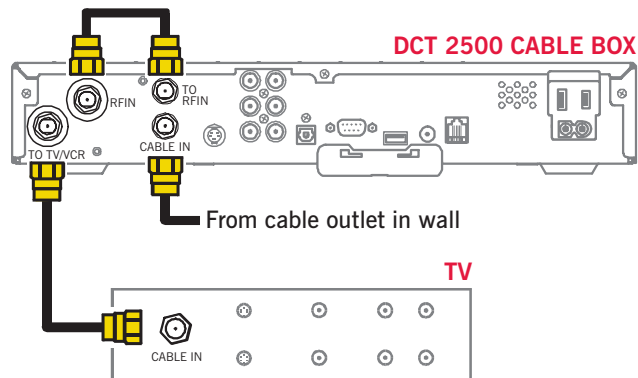


#### Option 2 – TV/VCR Set-Up (TV without video IN).

Watch all Digital channels available in your area, tape the channels you're watching and play tapes.

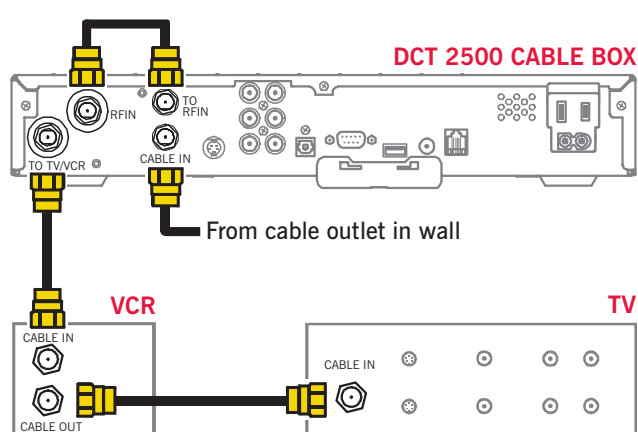

#### Option 3 – TV Set-Up.

Watch all Digital channels available in your area.

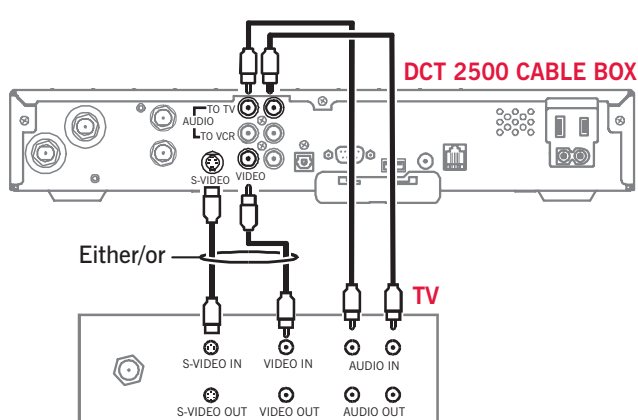

### STEP 2: Activate your Digital Cable box

When your digital box display reads "0" (which will take approximately **30 MINUTES**), call EastLink at **1-866-238-2390** to complete the final steps in activating your box. Our hours of operation are Mon-Fri 8am-9pm, Sat 9am-5pm. *If you are experiencing issues with receiving content or if you require a professional installer to complete your installation, a service charge may apply.*

## SECTION B: SETTING UP YOUR HIGH DEFINITION CABLE BOX (HD 6200)

### STEP 1: Hook up your digital cable box to your home entertainment system – **TWO** ways to connect

#### Option 1 – Hook up to High Definition Television (HDTV)


##### STEP A: Connecting the video

1. Connect an RF coaxial cable to the cable wall outlet and the **CABLE IN** connector on the HD 6200 box.

2. Connect the component video cables to the **Y, PB, and PR** connectors on your HDTV and HD 6200 box.


**OR**

Connect a DVI cable to the **DVI-OUT** on the HD 6200 box and the **DVI-HD** connector on your TV.

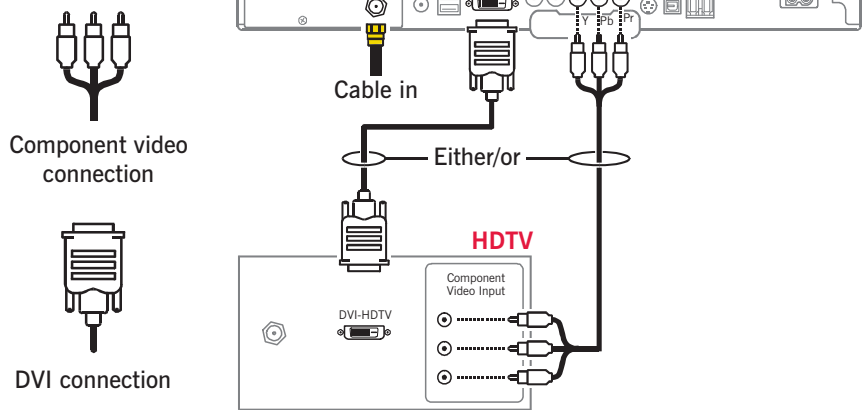

##### STEP B: Connecting the audio

Connect the stereo audio cables to both the **R AND L AUDIO OUT** connectors on the HD 6200 box and the **R AND L AUDIO INPUT** connectors on the HDTV.

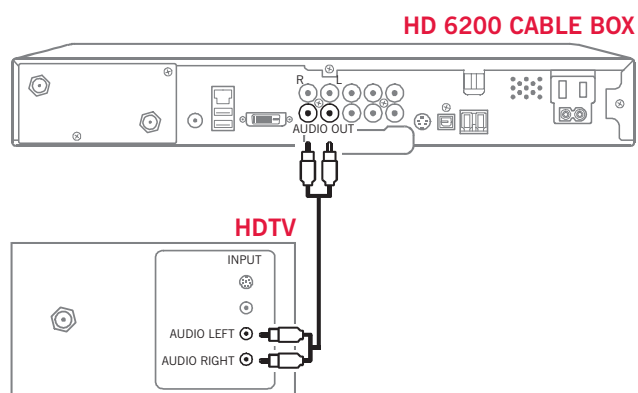

#### Option 2 – Hook up to High Definition Television (HDTV) to an A/V receiver

There are **THREE OPTIONS** available for audio connections to your A/V receiver:



- Optical
- Coaxial (SPDIF)
- Stereo Audio (Left and Right)

If your equipment supports it, Optical or Coaxial audio cables may be used in place of stereo audio outputs (Left and Right). In most cases these outputs offer a higher level of audio quality.

**OPTICAL:** Connect the Optical cable to the HD 6200 box and the Optical cable to the A/V receiver.

**COAXIAL (SPDIF):** Connect the digital audio cable to the SPDIF connector on the HD 6200 box and the digital input coax connector on the A/V receiver.

**STEREO AUDIO:** Connect the stereo audio cable to the Audio Left and Right on the HD 6200 box and the Audio Left and Right on the A/V receiver.

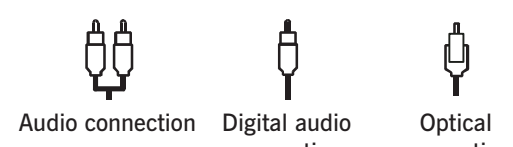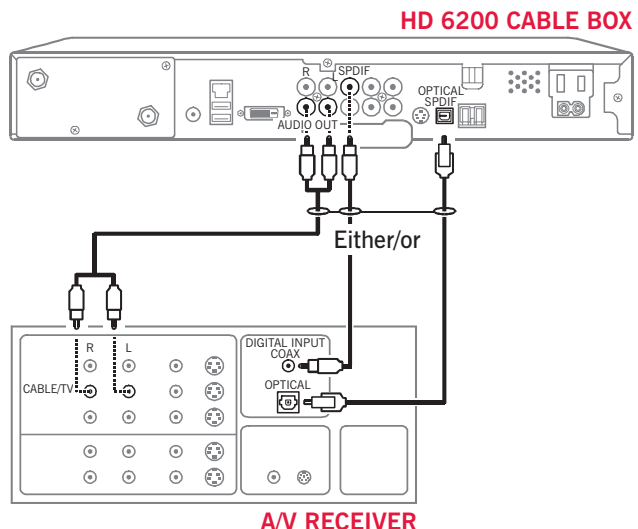

### STEP 2: Activate your High Definition Digital Cable box

1. At this point, you can now connect your HD box to an active cable outlet and connect the power. You should also connect the HD box to the television using either HD component cable/RCA/HDMI.
2. HD box displays DL on LED.
3. You should now wait approximately **20 MINUTES** for the HD box to download firmware and EastLink specific software. Your HD box will turn off after the download has been completed.
4. You may now turn your HD box back on, which should read "0" on the LED display.
5. You should now call EastLink at **1-866-238-2390** to activate your HD box for service. Our hours of operation are Mon-Fri 8am-9pm, Sat 9am-5pm.
6. After the customer service representative has activated and initialized your HD box you are now prepared to enjoy EastLink digital cable. However, you may have to wait approximately 20-30 min. for guide information to completely load.
7. To optimize your viewing experience you must adjust your video settings to complement your HD box. To do so, please follow the following steps:
  - a. Turn on your TV & HD box by clicking the "power" button on your remote.
  - b. Turn off HD box and hit "Menu".
  - c. Ensure that your "TV type" reads 16:9.
  - d. Depending on the type of your TV, please ensure that the section titled "HDMI/YpbPr" Output reads either 720 P or 1080 I.

*If you are experiencing issues with receiving content or if you require a professional installer to complete your installation, a service charge may apply.*

# SECTION C: SETTING UP YOUR HD/DVR CABLE BOX (HDDVR 6416)

**STEP 1:** Hook up your digital cable box to your home entertainment system – **THREE** ways to connect  
**For additional wiring, please see your local retail store.**

## Option 1 – Installing your HD/DVR 6416 box to HDTV

### STEP A: Connecting the video



#### COMPONENT VIDEO (YPBPR)

1. Connect an RF coaxial cable to the cable wall outlet and the **CABLE IN** connector on the HD/DVR 6416 box.
2. Connect the component video cables to the **Y, PB, AND PR CONNECTORS** on your HDTV and HD/DVR 6416 box.

#### HDMI

If your TV has a DVI input, use the DVI connection for your video:

- Connect a DVI cable to the **DVI-D OUT** connector on the HD/DVR 6416 box and the **DVI HDTV** connector on your TV.

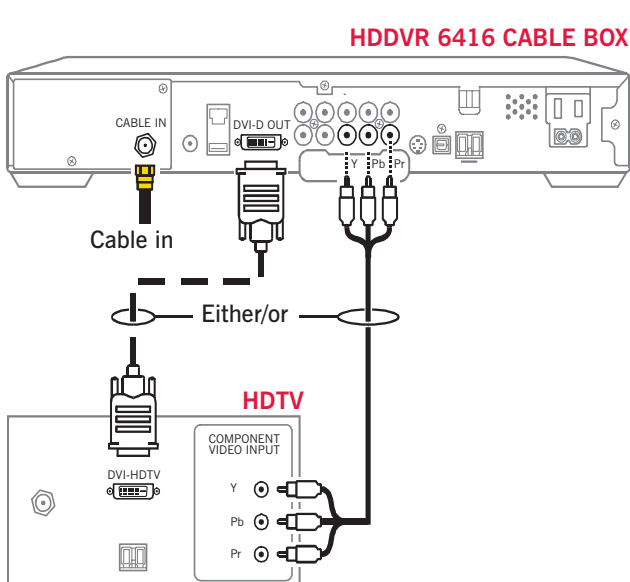
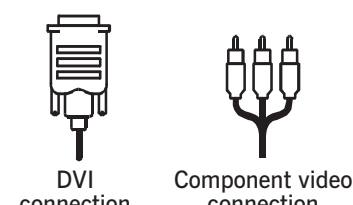


### STEP B: Connecting the audio

- Connect the stereo audio cable to the **AUDIO R AND L** connectors on the HD/DVR 6416 box and the **AUDIO LEFT** and **AUDIO RIGHT** connectors on the HDTV.

#### If your equipment supports it:

- The optical (Optical SPDIF) or coaxial digital (SPDIF) audio outputs may be used in place of the stereo audio outputs (Audio R and L). In most cases these outputs offer a higher level of audio quality, including support for 5.1 Surround Sound.

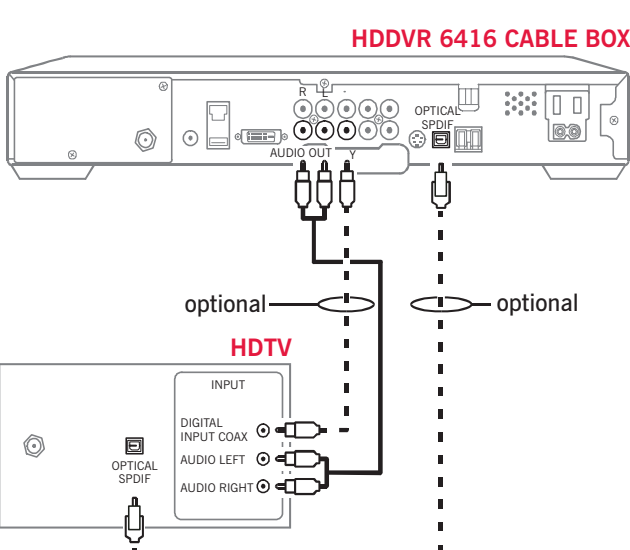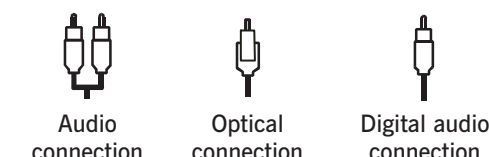

## Option 2 – Installing your HD/DVR 6416 box to an A/V Receiver – Audio

There are **THREE OPTIONS** available for audio connections to your A/V receiver:


- Optical (Optical SPDIF)
- Coaxial (SPDIF)
- Stereo Audio (Audio R and L)

If your equipment supports it, the optical (Optical SPDIF) or coaxial (SPDIF) audio outputs may be used in place of the stereo audio outputs (Audio R and L). In most cases these outputs offer a higher level of audio quality, including support for 5.1 surround sound.

**OPTICAL SPDIF:** Connect the optical SPDIF cable to the Optical SPDIF connector on the HD/DVR 6416 box and the Optical connector on the A/V receiver.



**SPDIF:** Connect the digital audio cable to the SPDIF connector on the HD/DVR 6416 box and the Digital Input Coax connector on the A/V receiver.

**STEREO AUDIO:** Connect the stereo audio cable to the Audio R and L connectors on the HD/DVR 6416 box and the Audio Left and Audio Right connectors on the A/V receiver.

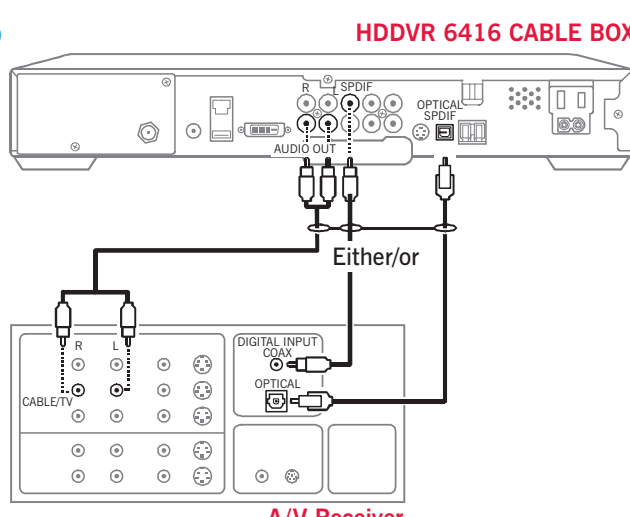

## Option 3 – Installing your HD/DVR 6416 box to a Stereo TV

1. Connect an RF coaxial cable to the cable wall outlet and the **CABLE IN** connector on the HD/DVR 6416 box.
2. Connect the stereo audio cable to the **AUDIO R AND L** connectors on the HD/DVR 6416 box and the **AUDIO LEFT** and **AUDIO RIGHT** connectors on the stereo TV.

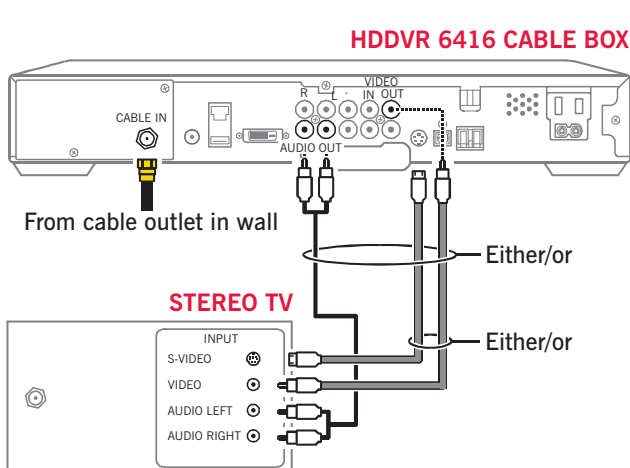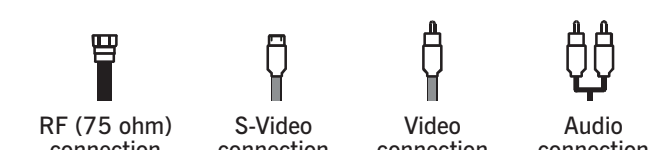

## STEP 2: Activate your High Definition Digital Video Recorder

1. At this point, you can now connect your HD/DVR box to an active cable outlet and connect the power. You should also connect the HD/DVR box to the television using either HD/DVR component cable/RCA/HDMI.
2. HD/DVR box displays "DL" on LED.
3. You should now wait approximately **20 MINUTES** for the HD/DVR box to download firmware and EastLink specific software. Your HD/DVR box will turn off after the download has been completed.
4. You may now turn your HD/DVR box back on, which should read "0" on the LED display.
5. You should now call EastLink at **1-866-238-2390** to activate your HD/DVR box for service. Our hours of operation are Mon-Fri 8am-9pm, Sat 9am-5pm.
6. After the customer service representative has activated and initialized your HD/DVR box you are now prepared to enjoy EastLink digital cable. However, you may have to wait approximately 20-30 min. for guide information to completely load.
7. To optimize your viewing experience you must adjust your video settings to complement your HD/DVR box. To do so, please follow the following steps:
  - a. Turn on your TV & HD/DVR box by clicking the "power" button on your remote.
  - b. Turn off HD/DVR box and hit "Menu".
  - c. Ensure that your "TV type" reads 16:9.
  - d. Depending on the type of your TV, please ensure that the section titled "HDMI/YpbPr" Output reads either 720 P or 1080 I.
  - e. If you do not have an HDTV, please ensure that your "HDMI/YpbPr" reads 480i. Also, the section that reads 4:3 Override must be "Off".
  - f. Turn box off by hitting the "power" button to store settings.

*If you are experiencing issues with receiving content or if you require a professional installer to complete your installation, a service charge may apply.*

